


FERCHER GmbH FERCHER GmbH, St. Thomas 10, 9400 Wolfsberg, Austria
VATIN: ATU70480437
Corporate register number: FN 448037 d
Commercial court: Landesgericht Klagenfurt
phone: +43 676 606 95 40
web: www.fercher.at
e-mail: office@fercher.at


FERCHER flue gas heatexchanger type **FW-600-10** - Datasheet

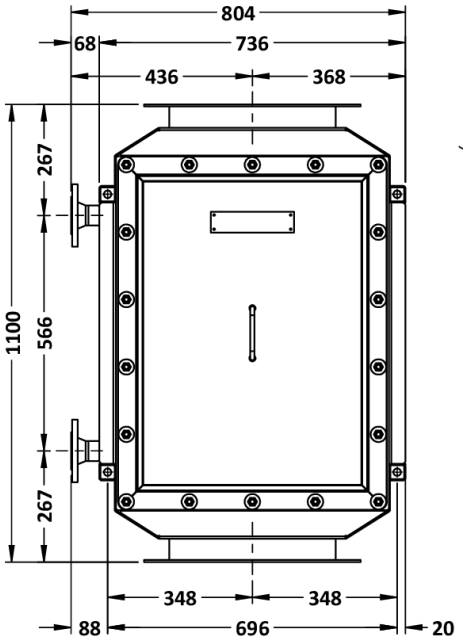

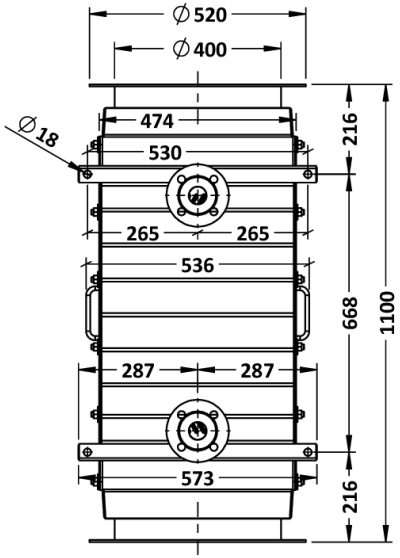

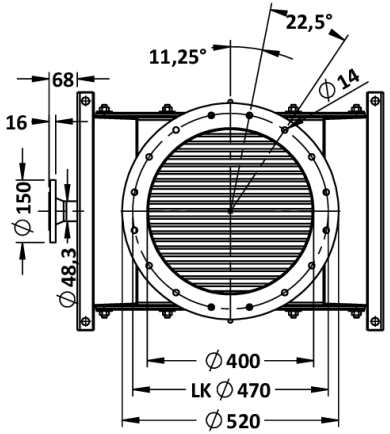

Detail: 1 1/2 Zoll Flansch (DIN2633 DN40)




General	
Model-name / Type:	**FW-600-10**
Construction-Type:	**Fully welded**
Material:	**AISI 316Ti AISI 316L**
External Dimensions	
Length:	**804 mm**
Width:	**573 mm**
Height:	**1 100 mm**
Weights	
Empty weight:	**302 kg**
Internal-Volume:	**42 L**
Operating-Weight:	**344 kg**

Flue gas	
Maximum-Flowrate:	**7 000 m³/h**
Max. allowed temperature:	**500 °C**
Max. allowed pressure:	**3 000 Pa (30 mbar)**
Flue gas-Inlet:	**flange DN400**
Flue gas-Outlet:	**flange DN400**
Heating-Water	
Nominal-Flowrate:	**1,5 L/s**
Max. allowed temperature:	**110,0 °C**
Max. allowed pressure:	**10 bar**
Heating-Water inlet (DIN2633):	**1 1/2 inch flange**
Heating-Water outlet (DIN2633):	**1 1/2 inch flange**

Cleaning: Manual cleaning (for instance with brush/pressure-cleaner/steam) is possible without disassembling the heatexchanger, just take off the panels (exhaust-gas flow must be off).

Exhaustgas-Connections: Included: 2 pcs. loose counter-flanges (for exhaustgas-connection) and 2 pcs. exhaustgas-flange-gaskets. Above mentioned weights include the weight for these counter-flanges and gaskets.

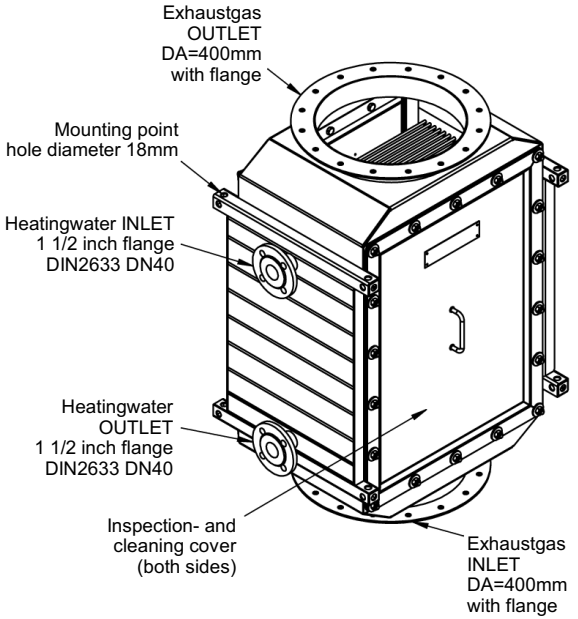



Technical changes in the interest of technical progress are reserved. Errors excepted. This document is the unrestricted intellectual property of FERCHER GmbH.

FERCHER flue gas heatexchanger type **FW-600-10** - Characteristic curves

Following characteristics are valid for the following operation (Exhaustgas from Gas/Oil-Burner) , Heatingwater-Temperature-IN: **60 °C**, Volume-Flow: **1,5 L/s (=5,4 m³/h)**
Heatingwater pressuredrop at 1,5 L/s Volume-Flow: 0,1 bar
Flue gas flowrates are real volume flow rates, reference temperature is flue gas IN temperature

*For special/individual calculations please contact us at **office@fercher.at**. We gladly help you with choosing the correct heatexchanger and with calculations.*

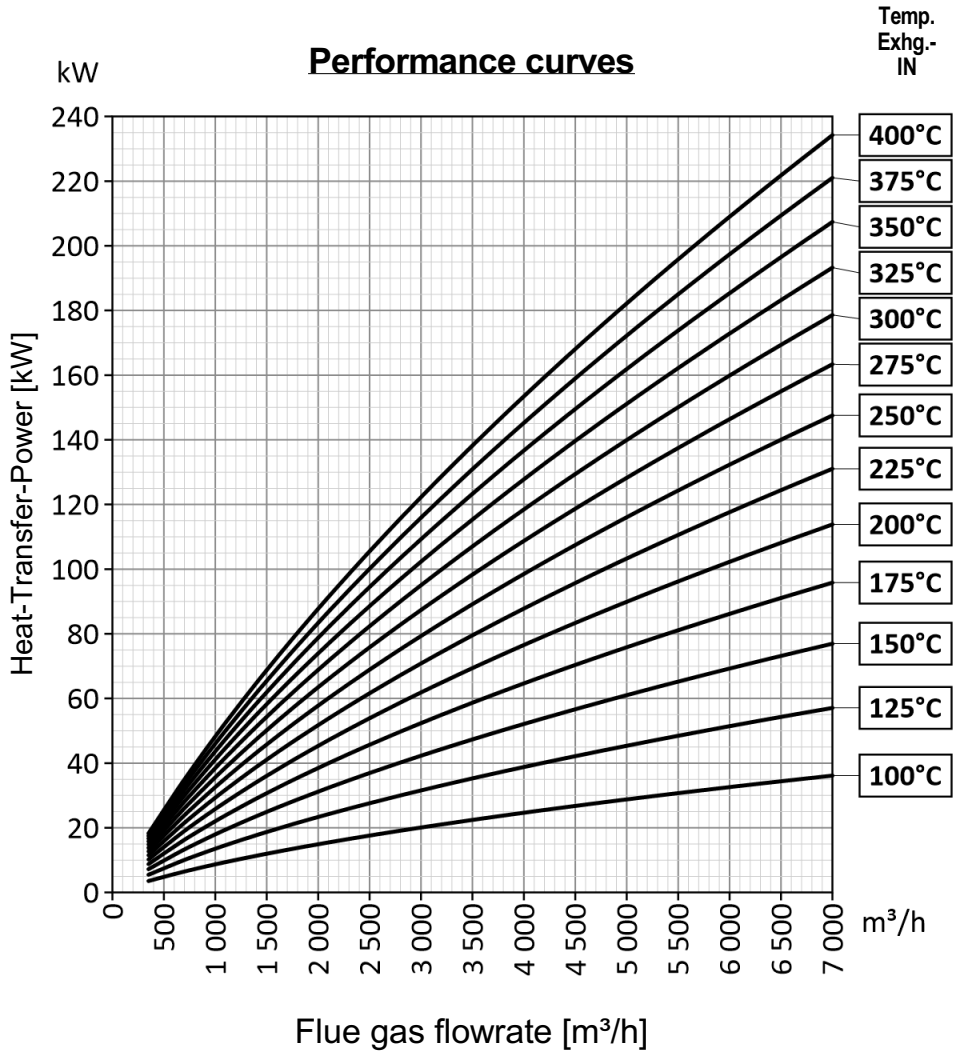

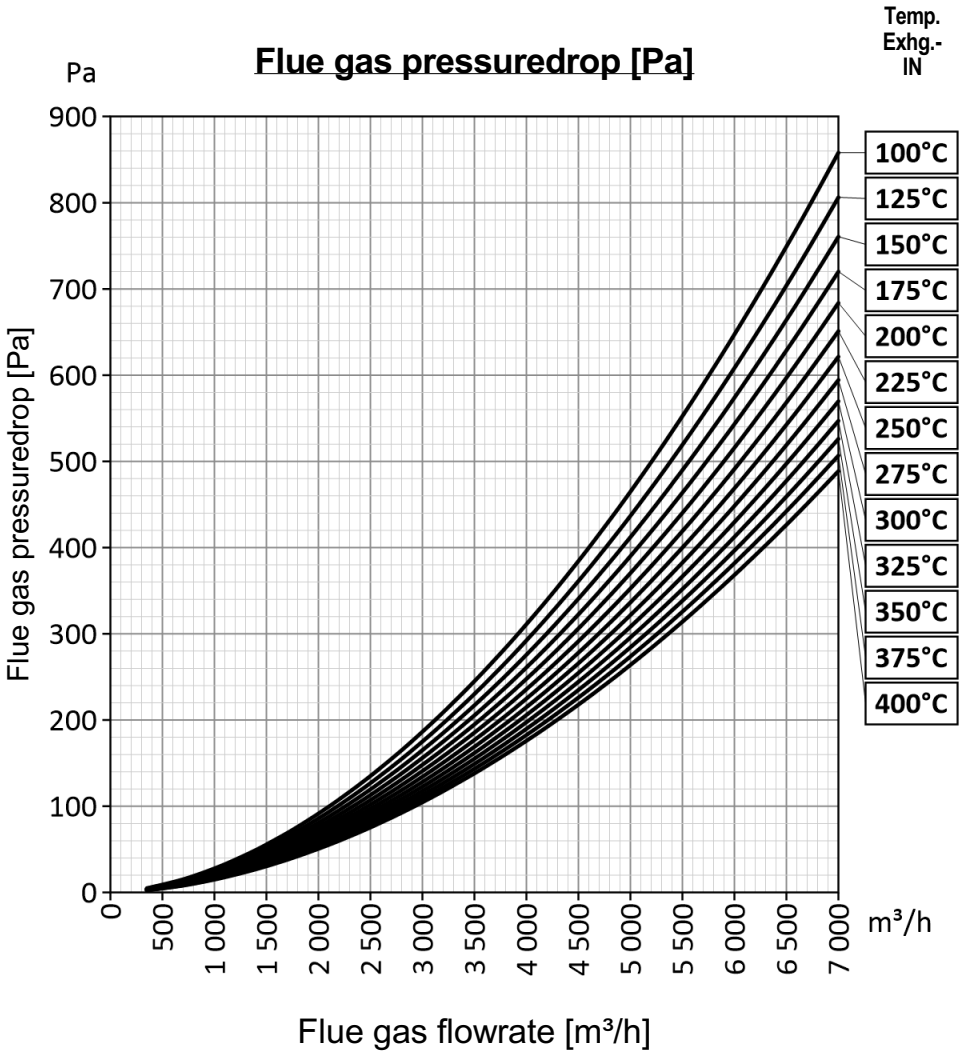

Technical changes in the interest of technical progress are reserved. Errors excepted. This document is the unrestricted intellectual property of FERCHER GmbH.