



FERCHER Wastewater-Heatexchanger Type **FB-16/W-2-1** - Datasheet

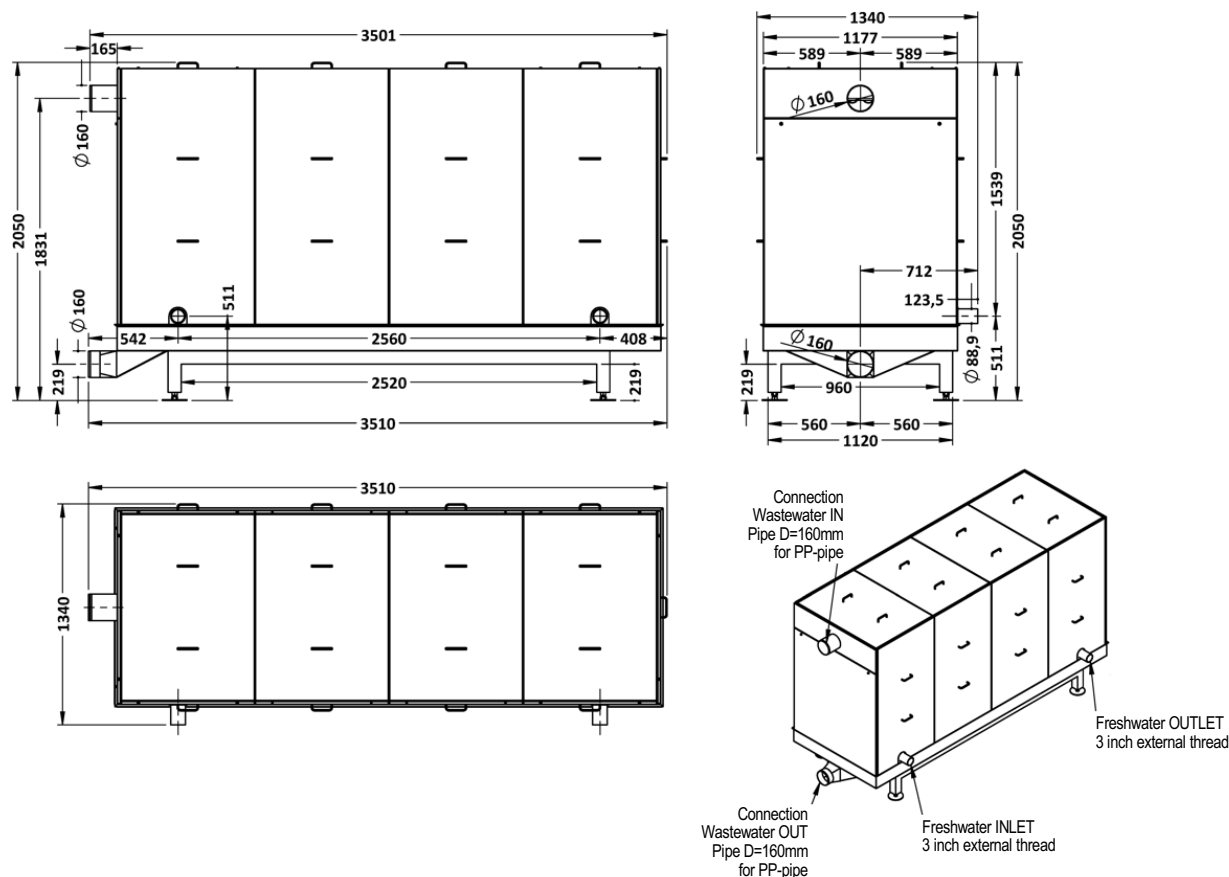

General		Wastewater	
Model-name / Type:	FB-16/W-2-1	Maximum-Flowrate:	16,0 L/s
Material:	AISI 316L	Max. allowed temperature:	100 °C
External Dimensions		Wastewater-Inlet:	pipe D=160
Length:	3 510 mm	Wastewater-Outlet:	pipe D=160
Width:	1 340 mm	Freshwater	
Height:	2 050 mm	Maximum-Flowrate:	22,4 L/s
Weights		Max. allowed pressure:	6 bar
Empty weight:	1 459 kg	Water-Inlet:	3 inch external thread
		Water-Outlet:	3 inch external thread

Cleaning: Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

View: Covers removed

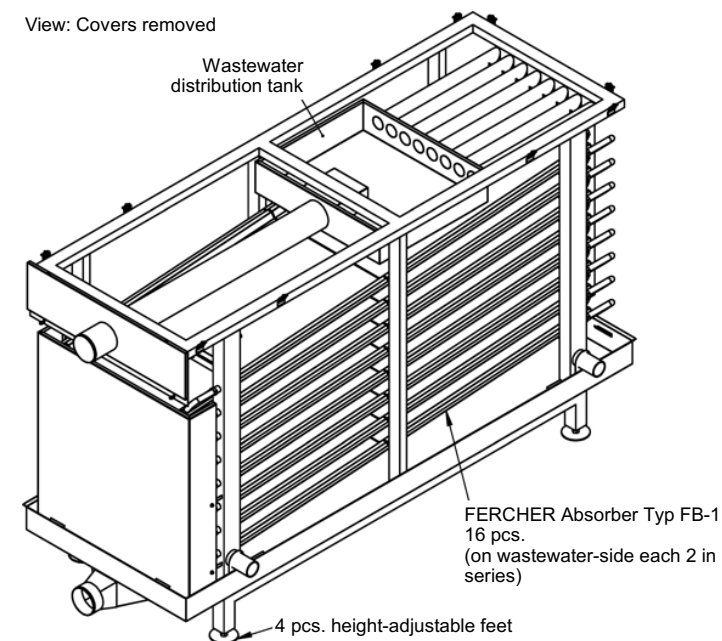

FERCHER Wastewater-Heatexchanger Type **FB-16/W-2-1** - Characteristics

Curves are valid for operation with freshwater-IN-flow of 16,0 L/s at 15°C

For special/individual calculations please contact us at office@fercher.at. We gladly help you with choosing the correct heatexchanger and with calculations.

