





FERCHER Wastewater-Heatexchanger Type **FB-2/S-1-1** - Datasheet

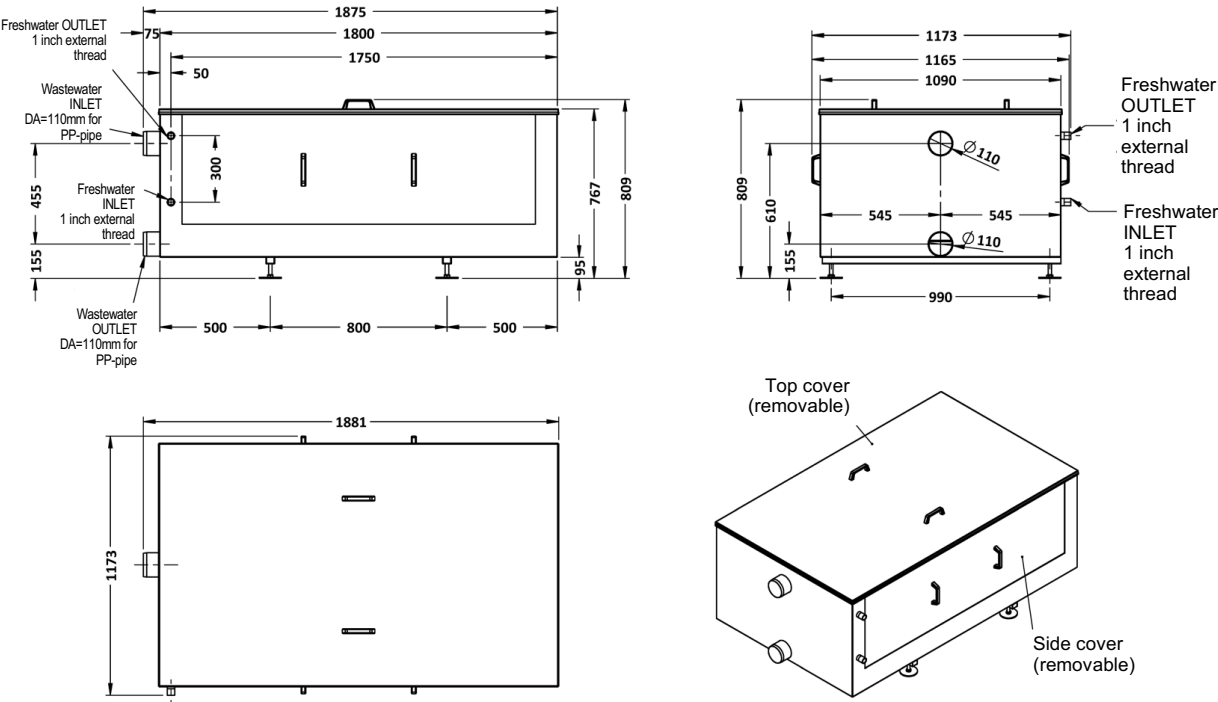

General	Wastewater
Model-name / Type: FB-2/S-1-1	Maximum-Flowrate: 4,0 L/s
Material: AISI 316L	Max. allowed temperature: 100 °C
External Dimensions	Wastewater-Inlet: pipe D=110
Length: 1 875 mm	Wastewater-Outlet: pipe D=110
Width: 1 173 mm	Freshwater
Height: 809 mm	Maximum-Flowrate: 2,8 L/s
Weights	Max. allowed pressure: 6 bar
Empty weight: 206 kg	Water-Inlet: 1 inch external thread
	Water-Outlet: 1 inch external thread

Cleaning: Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

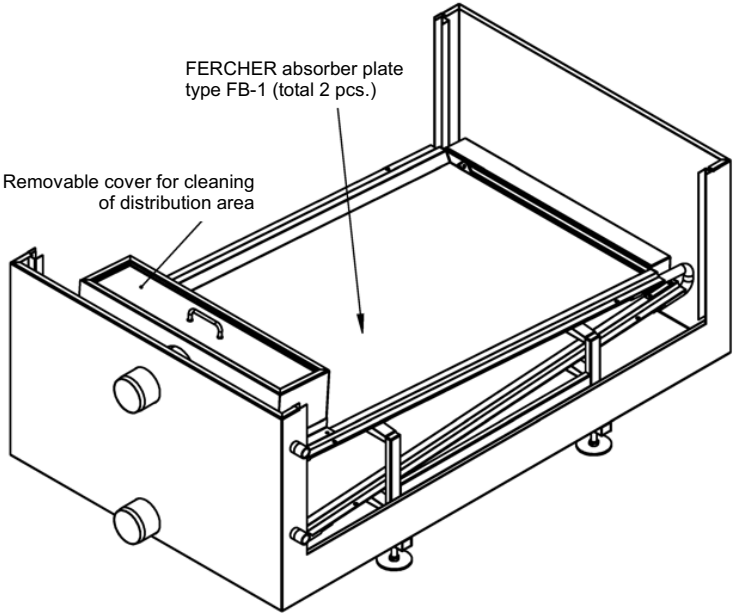

FERCHER Wastewater-Heatexchanger Type **FB-2/S-1-1** - Characteristics

Curves are valid for operation with freshwater-IN-temperature of 15°C

For special/individual calculations please contact us at office@fercher.at. We gladly help you with choosing the correct heatexchanger and with calculations.

