


FERCHER Wastewater-Heatexchanger Type **FB-30/W-2-1** - Datasheet

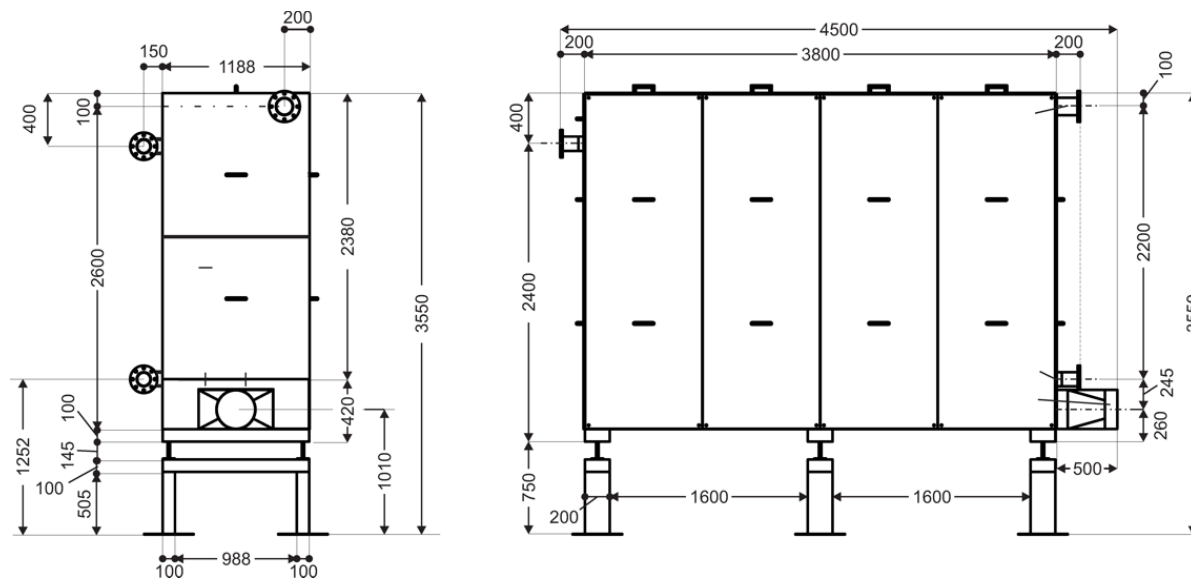

General	
Model-name / Type:	FB-30/W-2-1
Material:	AISI 316L
External Dimensions	
Length:	3 660 mm
Width:	1 580 mm
Height:	3 484 mm
Weights	
Empty weight:	1 775 kg

Wastewater	
Maximum-Flowrate:	30,0 L/s
Max. allowed temperature:	100 °C
Wastewater-Inlet:	flange DN100
Wastewater-Outlet:	pipe D=300
Freshwater	
Maximum-Flowrate:	42,0 L/s
Max. allowed pressure:	6 bar
Water-Inlet:	flange DN100
Water-Outlet:	flange DN100

Cleaning: Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)



FERCHER Wastewater-Heatexchanger Type FB-30/W-2-1 - Characteristics

Curves are valid for operation with freshwater-IN-flow of 30,0 L/s at 15°C

For special/individual calculations please contact us at office@fercher.at. We gladly help you with choosing the correct heatexchanger and with calculations.

