


FERCHER Wastewater-Heatexchanger Type **FB-30/W-2-2** - Datasheet

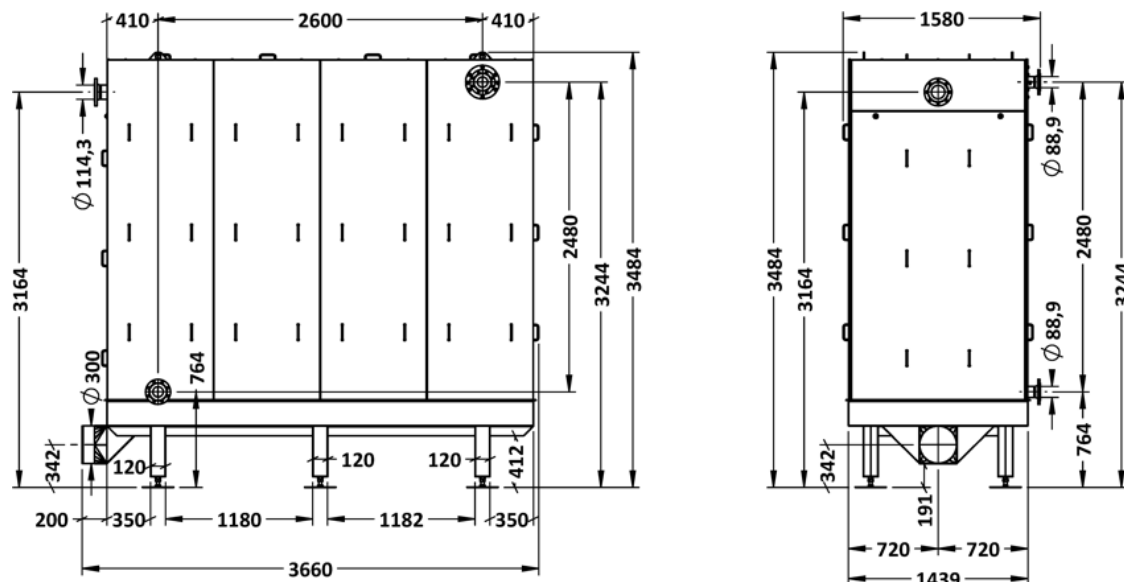

4 pcs. mounting
points (hole
diameter 40mm)

Wastewater INLET
Flange DN100
DIN2633

Freshwater OUT
Flange DN80
DIN2633


Connection
Wastewater OUT
Pipe D=300mm
for PP-pipe

Freshwater INLET
Flange DN80
DIN2633

General	
Model-name / Type:	FB-30/W-2-2
Material:	AISI 316L
External Dimensions	
Length:	3 660 mm
Width:	1 580 mm
Height:	3 484 mm
Weights	
Empty weight:	2 096 kg

Wastewater	
Maximum-Flowrate:	30,0 L/s
Max. allowed temperature:	100 °C
Wastewater-Inlet:	4 inch flange
Wastewater-Outlet:	pipe D=300
Freshwater	
Maximum-Flowrate:	15,0 L/s
Max. allowed pressure:	6 bar
Water-Inlet:	3 inch flange
Water-Outlet:	3 inch flange

Cleaning: Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

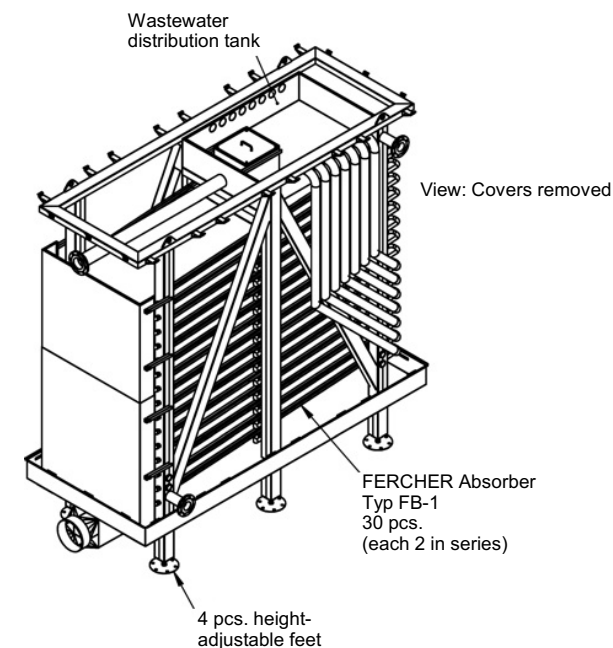

FERCHER Wastewater-Heatexchanger Type **FB-30/W-2-2** - Characteristics

Curves are valid for operation with freshwater-IN-temperature of 15°C

For special/individual calculations please contact us at office@fercher.at. We gladly help you with choosing the correct heatexchanger and with calculations.

