



## FERCHER Wastewater-Heatexchanger Type **FB-8/W-2-2** - Datasheet

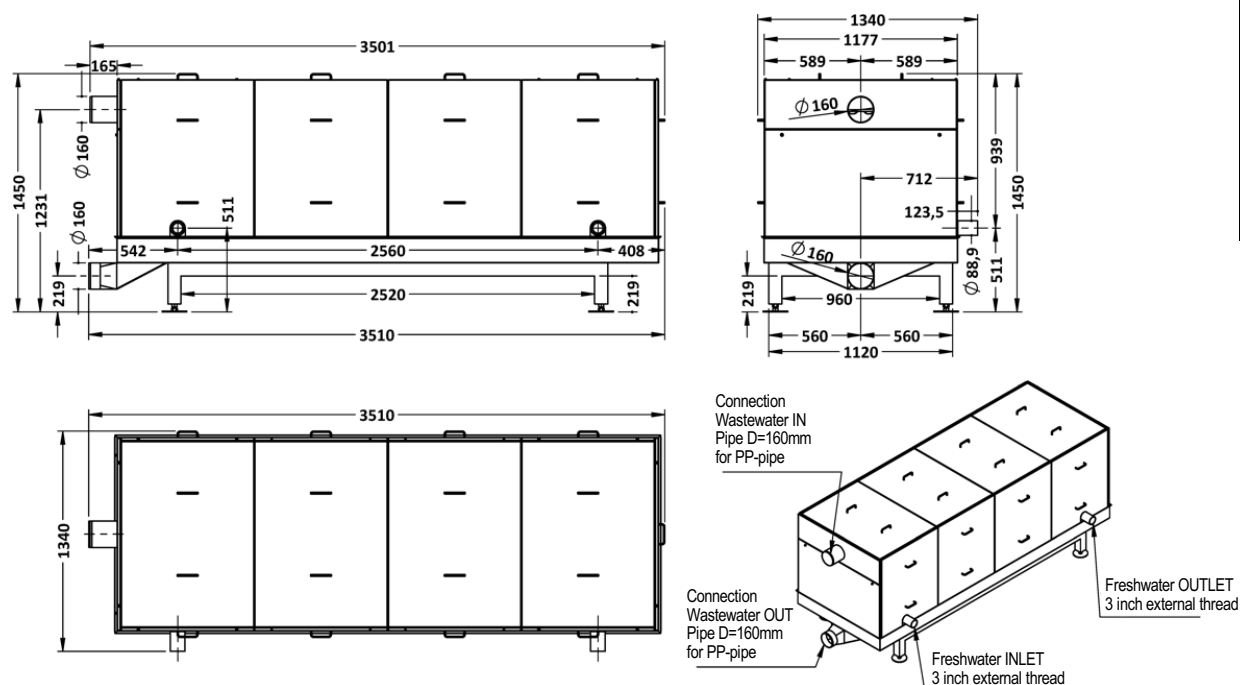

General		Wastewater	
Model-name / Type:	FB-8/W-2-2	Maximum-Flowrate:	8,0 L/s
Material:	AlSi 316L	Max. allowed temperature:	100 °C
External Dimensions		Wastewater-Inlet:	pipe D=160
Length:	3 510 mm	Wastewater-Outlet:	pipe D=160
Width:	1 340 mm	Freshwater	
Height:	1 450 mm	Maximum-Flowrate:	4,0 L/s
Weights		Max. allowed pressure:	6 bar
Empty weight:	897 kg	Water-Inlet:	3 inch external thread
		Water-Outlet:	3 inch external thread

**Cleaning:** Wastewater-side of heatexchanger can be cleaned during full operation, just take off panels and clean (for instance with pressure-cleaner and/or brush)

View: Covers removed

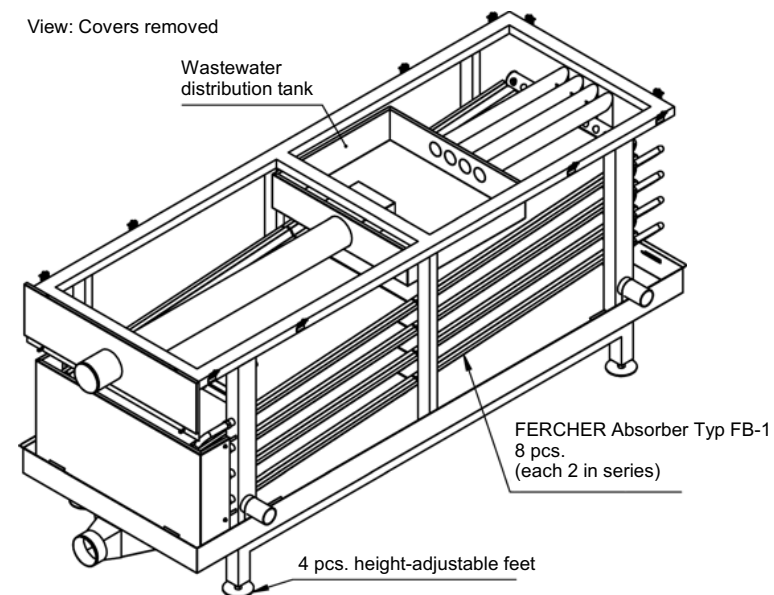



# FERCHER Wastewater-Heatexchanger Type **FB-8/W-2-2** - Characteristics

Curves are valid for operation with freshwater-IN-temperature of 15°C

For special/individual calculations please contact us at [office@fercher.at](mailto:office@fercher.at). We gladly help you with choosing the correct heatexchanger and with calculations.

